


# Load cell analog signal amplifier

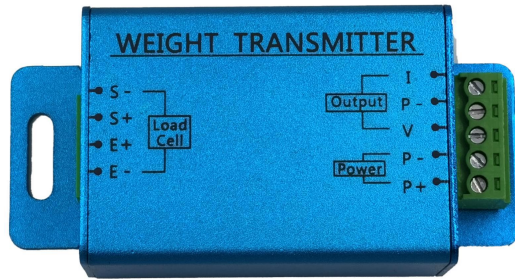

## Features

- Excitation 15-30V DC
- Output 4-20mA, 0-5V, 0-10V
- Accuracy 0.1%F.S.
- Collection rate 100KHZ
- Easy connection
- Potentionmeter adjustment

## DESCRIPTION

The transmitter adopts aluminum alloy shell, and the internal high-performance devices are used to precisely amplify the sensor output signal. Convert mechanical signal into standard current and voltage output, switchable 0-5V, 0-10V, 4-20mA, 0-20mA. It can be directly connected with interfaces such as PLC single-chip computer terminal of automatic control equipment.

## DIMENSIONS (mm)

